

Get Fast, Safe Heat With The World's Finest... MASTER FLAMELESS HEAT TOOLS!


- shrink tubing
- de-solder • set pre-coated rivets • soften, mold, weld, form plastics • dry paint, plastic finishes, condensation, or parts after washing • speed plastic and epoxy curing • handle hundreds of other jobs.

Flameless Heat Guns

MODEL	VOLTAGE	AMP.	TEMP. F.°	NET
HG 201	115	5	200/300	\$44.30
HG 202	230	3	200/300	51.95
HG 301	115	12	300/500	44.30
HG 302	230	5	300/500	51.95
HG 501	115	14	500/750	49.90
HG 502	230	8	500/750	55.25
HG 751	115	20	750/1000	59.95
HG 752	230	9	750/1000	67.85

Master
UP TO 1000° F.

Have adjustable air intake for controlling the air blast temperature; double jacketed heater housing, made of rugged, die-cast aluminum; 3-wire U.L. approved cord; fast, quiet, efficient turbo type fan. 50/60 and 400 cycle models available. Attachments available. Choose from 8 models.

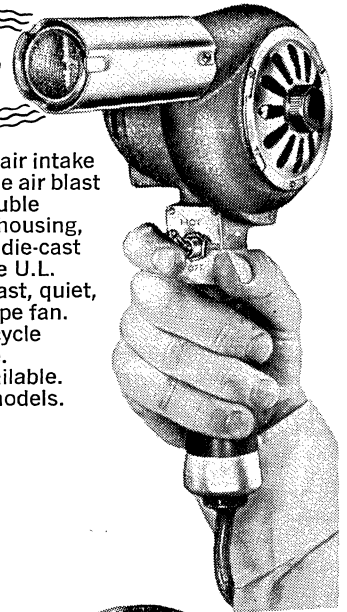


Flameless Continuous Duty Air Heater Blowers

MODEL	VOLTAGE A.C.	CYCLE	AMP.	TEMP. F°	AIR VOLUME C.F.M.	AIR VELOCITY F.P.M.	NET RESALE
AH 301	115	60	10	300	14.82	1425	\$56.65
AH 302	230	60	5	300	16.2	1550	68.35
AH 501	115	60	14	500	13.75	1375	59.95
AH 502	230	60	6	500	14	1400	71.65
AH 751	115	60	18	750	13.5	1350	78.35
AH 752	230	60	11	750	13.5	1350	90.25

Master
UP TO 750°


Mounts permanently for production line use or move from location to location. 2" dia. nozzle concentrates heat on desired area. 6" x 6" base, 6" high over-all. Attachments available. Choose from 6 models.

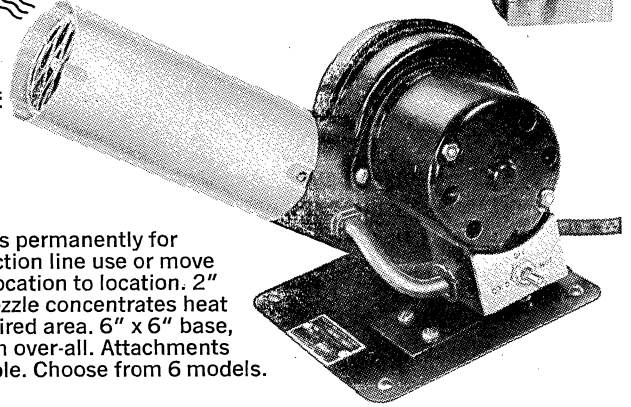

New Master Flameless Air Heat Torch

CHART OF APPROXIMATE TEMPERATURES OBTAINED 1/4" FROM NOZZLE IN F° @ 120 VOLTS							
SPECIFY RATING WHEN ORDERING	NET RESALE	POUNDS OF PRESSURE					
		RATING 8 lbs.	7 lbs.	6 lbs.	5 lbs.	4 lbs.	3 lbs. 2 lbs.
FHT-67-1 W/Shield FHT-67-2 Less/Shield	\$88.00 85.00	250 Watts	250°	300°	330°	360°	390° 420° 500°
FHT-67-1 W/Shield FHT-67-2 Less/Shield	90.50 87.50	350 Watts	350°	400°	450°	550°	550° 600° 700°
FHT-67-1 W/Shield FHT-67-2 Less/Shield	92.50 89.50	450 Watts	450°	500°	550°	600°	650° 700° 850°
FHT-67-1 W/Shield FHT-67-2 Less/Shield	94.50 91.50	550 Watts	550°	600°	650°	700°	775° 875° 1050°

Operates in contaminated atmosphere **without** danger. Weighs a mere 1 lb. Handles easily. Pinpoints heat in small areas at any selected pressure. Lets you hold temperatures plus or minus 1°. Works off conventional air compressors, small motor driven compressors or inert gas. Has a molded handle, all stainless steel barrel and nozzle. Comes with 10' contaminate-proof hose. Welds PVC's, polypropylenes, polyethylenes, Welding tips and carrying case available as optional equipment.

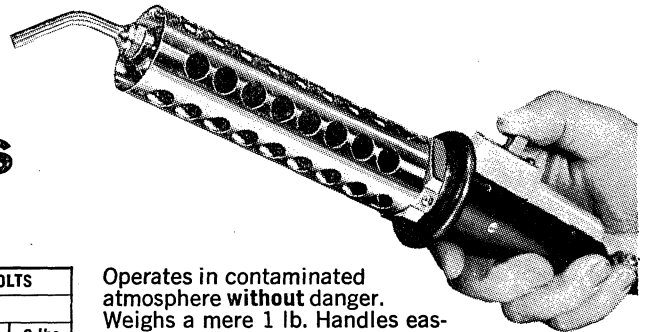

WHY INDUSTRY LEADERS EVERYWHERE SPECIFY MASTER FLAMELESS HEAT TOOLS!

The reason is simple. Master Appliance Corporation pioneered flameless heat tool development. So it's natural that they know more about designing and building quality heat tools than any other manufacturer. In short, people who want the best insist on Master capacity, performance and trouble-free dependability. Isn't it time you found out for yourself?

AVAILABLE AT LEADING DISTRIBUTORS.